

Eagle HC 60P 275-295 Watt

POLY CRYSTALLINE MODULE

Positive power tolerance of 0~+3%

- Half Cell
- Poly 60 Cell
- System Voltage: 1000 VDC

(Made in China)



KEY FEATURES



5 Busbar Solar Cell:

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Efficiency:

Higher module conversion efficiency (up to 17.56%) benefits from Half Cells structure (low resistance characteristics).



PID RESISTANT:

Limited power degradation of Eagle module caused by PID effect is guaranteed under strict testing condition (85°C / 85%RH, 96 hours) for mass production.



Low-light Performance:

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability against extreme environmental conditions:

High salt mist and ammonia resistance certified by TUV NORD.




LINEAR PERFORMANCE WARRANTY


10 Year Product Warranty • 25 Year Linear Power Warranty

- ISO9001:2008, ISO14001:2004, OHSAS18001 certified factory.

- IEC61215, IEC61730 certified products

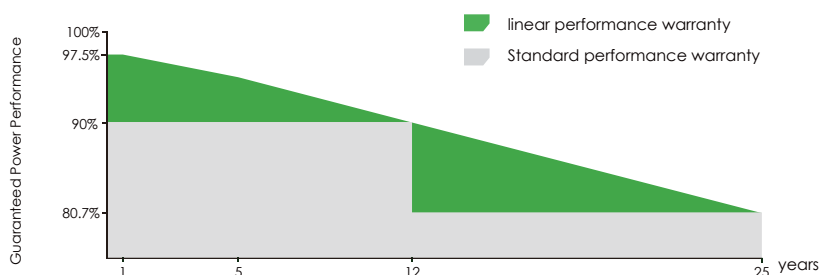

Engineering Drawings

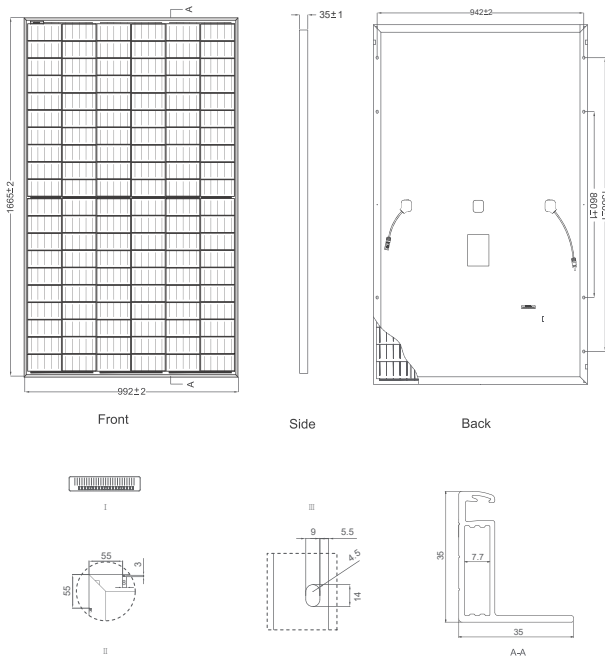


Packaging Configuration

(Two pallets = One stack)

26pcs/pallet, 52pcs/stack, 840pcs/40'HQ Container

Electrical Performance & Temperature Dependence

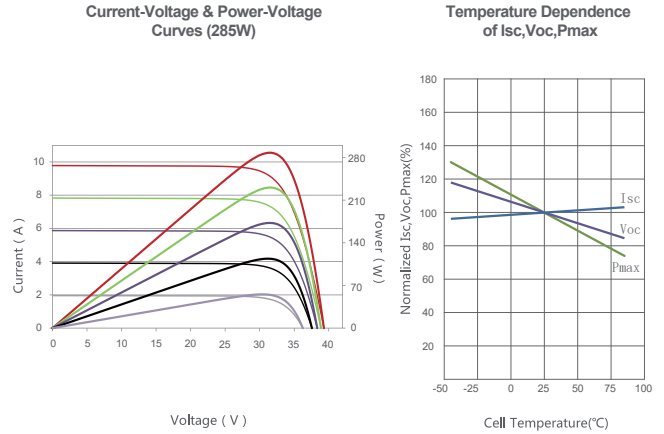

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of Half-cells	120 (12×10)
Dimensions	1665×992×35mm (65.55×39.05×1.38 inch)
Weight	19.0 kg (41.9 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables (+) 290mm, (-) 145mm or Customized Length	
Connector	JK03M; Jinko PV Material

SPECIFICATIONS

Module Type	JKM275PP-60H		JKM280PP-60H		JKM285PP-60H		JKM290PP-60H		JKM295PP-60H	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	275Wp	205Wp	280Wp	209Wp	285Wp	213Wp	290Wp	217Wp	295Wp	221Wp
Maximum Power Voltage (Vmp)	32.0V	29.3V	32.3V	29.6V	32.5V	29.9V	32.8V	30.2V	33.1V	30.5V
Maximum Power Current (Imp)	8.61A	7.00A	8.69A	7.06A	8.77A	7.12A	8.85A	7.19A	8.93A	7.25A
Open-circuit Voltage (Voc)	38.7V	35.9V	39.0V	36.1V	39.3V	36.4V	39.6V	36.7V	39.9V	36.9V
Short-circuit Current (Isc)	9.38A	7.37A	9.50A	7.42A	9.78A	7.47A	9.85A	7.53A	9.93A	7.57A
Module Efficiency STC (%)	16.65%		16.95%		17.26%		17.56%		17.86%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000V DC (IEC)									
Maximum series fuse rating	20A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.37%/°C									
Temperature coefficients of Voc	-0.31%/°C									
Temperature coefficients of Isc	0.06%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%