

# Eagle HC 72M-V 370-390 Watt

MONO CRYSTALLINE MODULE

Positive power tolerance of 0~+3%

- Half Cell
- Mono PERC 72 Cell
- System Voltage: 1500 VDC

(Made in China)



PERC



## KEY FEATURES



### System Voltage:

The maximum voltage is promoted to 1500V and the module strings are extended by 50% which reduces the overall system BOS.



### 5 Busbar Solar Cell:

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



### High Efficiency:

Higher module conversion efficiency (up to 19.79%) benefit from Passivated Emmitter Rear Contact technology.



### PID RESISTANT:

Limited power degradation of Eagle module caused by PID effect is guaranteed under strict testing condition (85 C /85%RH,96hours) for mass production.



### Low-light Performance:

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



### Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



### Durability against extreme environmental conditions:


High salt mist and ammonia resistance certified by TUV NORD.




## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

- ISO9001:2008、ISO14001:2004、OHSAS18001 certified factory.
- IEC61215、IEC61730 certified products

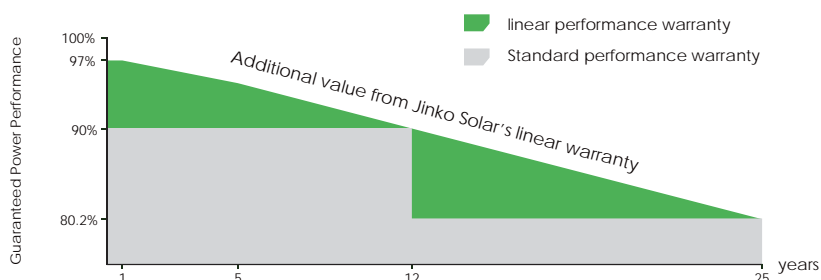

## Engineering Drawings

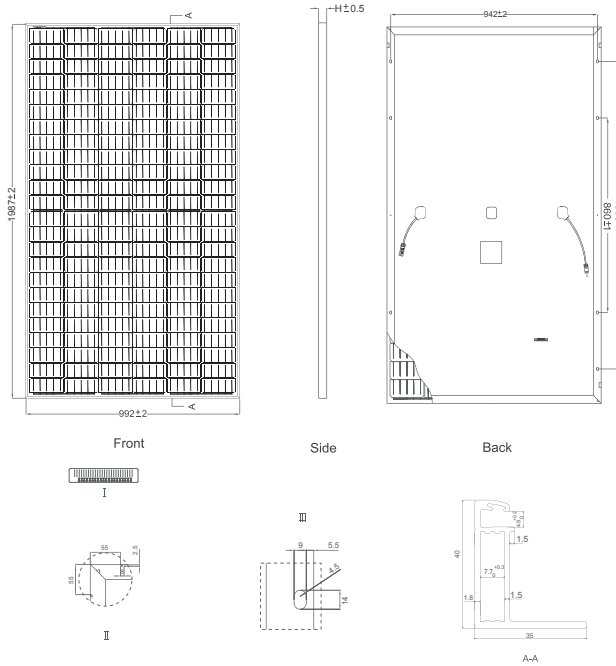


## Packaging Configuration

( Two pallets =One stack )

26pcs/pallet , 52pcs/stack, 572 pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

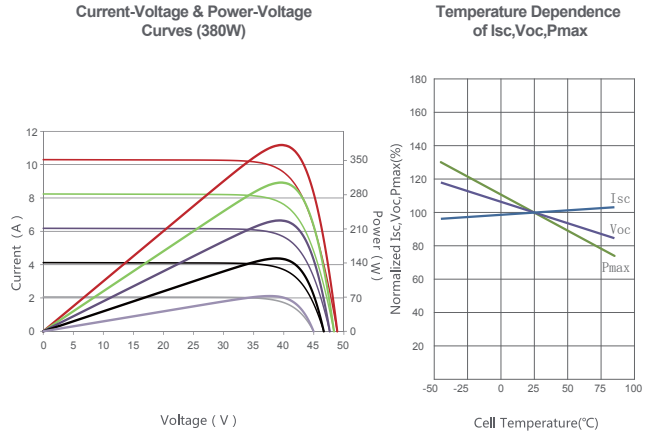

## Mechanical Characteristics

Cell Type Mono-crystalline PERC 156×156mm (6 inch)

No.of Half-cells 144 (12×12)

Dimensions 1987×992×40mm (78.23×39.05×1.57 inch)

Weight 22.5 kg (49.6 lbs)

Front Glass 3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass

Frame Anodized Aluminium Alloy

Junction Box IP67 Rated

Output Cables (+): 290mm, (-): 145mm or Customized Length

Connector JK03M; Jinko PV Material

## SPECIFICATIONS

Module Type	JKM370M-72H-V		JKM375M-72H-V		JKM380M-72H-V		JKM385M-72H-V		JKM390M-72H-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	370Wp	278Wp	375Wp	282Wp	380Wp	286Wp	385Wp	290Wp	390Wp	294Wp
Maximum Power Voltage (Vmp)	39.9V	38.1V	40.2V	38.3V	40.5V	38.6V	40.8V	38.8V	41.1V	39.1V
Maximum Power Current (Imp)	9.28A	7.30A	9.33A	7.36A	9.39A	7.42A	9.44A	7.48A	9.49A	7.54A
Open-circuit Voltage (Voc)	48.5V	47.0V	48.7V	47.2V	48.9V	47.5V	49.1V	47.7V	49.3V	48.0V
Short-circuit Current (Isc)	10.15A	7.75A	10.23A	7.82A	10.30A	7.88A	10.38A	7.95A	10.46A	8.02A
Module Efficiency STC (%)	18.77%		19.02%		19.28%		19.53%		19.79%	
Operating Temperature(°C)					-40°C~+85°C					
Maximum system voltage					1500V DC (IEC)					
Maximum series fuse rating					20A					
Power tolerance					0~+3%					
Temperature coefficients of Pmax					-0.36%/°C					
Temperature coefficients of Voc					-0.28%/°C					
Temperature coefficients of Isc					0.048%/°C					
Nominal operating cell temperature (NOCT)					45±2°C					

STC: Irradiance 1000W/m<sup>2</sup>

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup>

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

\* Power measurement tolerance: ± 3%