


Engineering Drawings

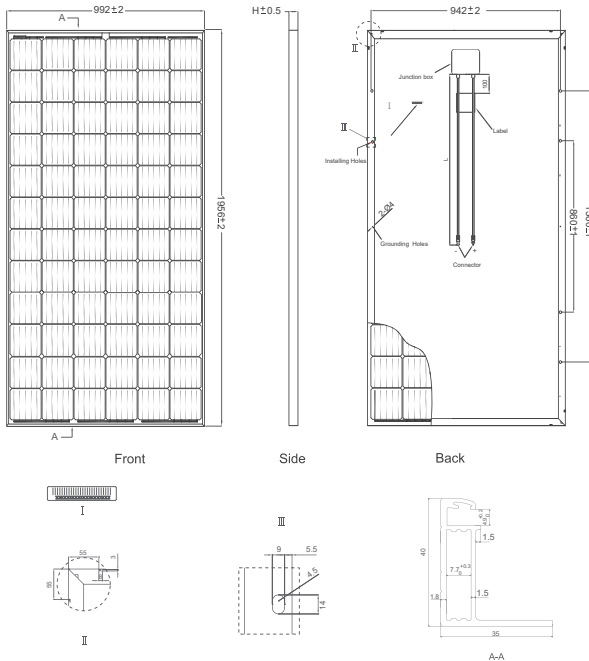


Packaging Configuration

(Two pallets =One stack)

26pcs/pallet , 52pcs/stack, 624 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

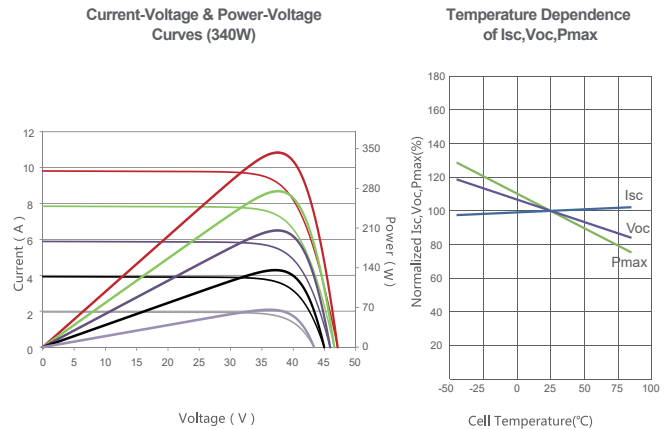

Mechanical Characteristics

Cell Type	Mono-crystalline 156×156mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)
Weight	22.5 kg (49.6 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1×4.0mm ² Length:900mm or Customized Length
Connector	JK03M; Jinko PV Material
Fire Rating	Class C

SPECIFICATIONS

Module Type	JKM350M-72		JKM360M-72	
	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	350Wp	262Wp	360Wp	270Wp
Maximum Power Voltage (Vmp)	39.1V	37.2V	39.5V	37.7V
Maximum Power Current (Imp)	8.94A	7.05A	9.12A	7.17A
Open-circuit Voltage (Voc)	47.5V	46.0V	48.0V	46.5V
Short-circuit Current (Isc)	9.88A	7.46A	10.02A	7.61A
Module Efficiency STC (%)	18.04%		18.55%	
Operating Temperature(°C)	-40°C~+85°C			
Maximum system voltage	1500VDC (IEC)			
Maximum series fuse rating	20A			
Power tolerance	0~+3%			
Temperature coefficients of Pmax	-0.38%/°C			
Temperature coefficients of Voc	-0.29%/°C			
Temperature coefficients of Isc	0.048%/°C			
Nominal operating cell temperature (NOCT)	45±2°C			

* STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%