

Tiger Neo N-type 54HL4R-(V) 415-435 Watt MONO-FACIAL MODULE


N-Type

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018
Occupational health and safety management systems
(Made in China)

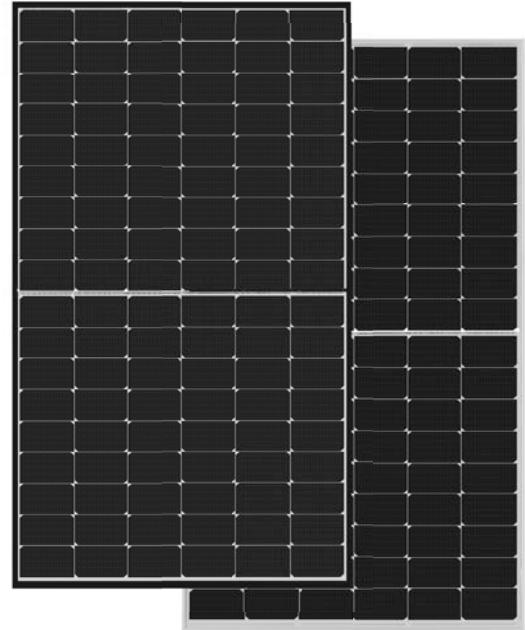

Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.




Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



LINEAR PERFORMANCE WARRANTY

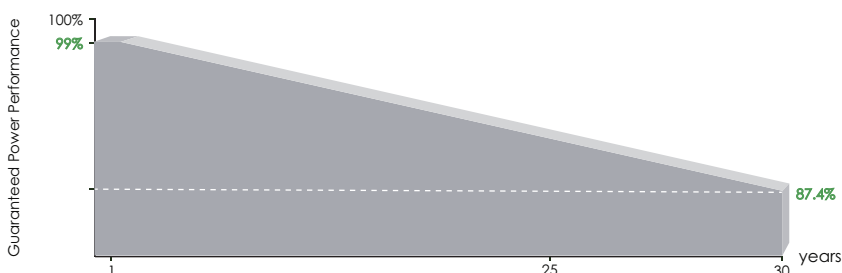



25* Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

*The product warranty is only applicable in Australia

Engineering Drawings

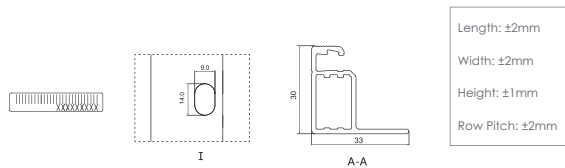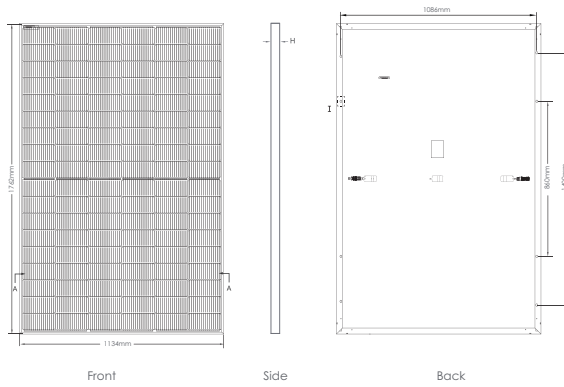


*This tolerance range applies only to the four-angle distance of the module as indicated above.

Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 936pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

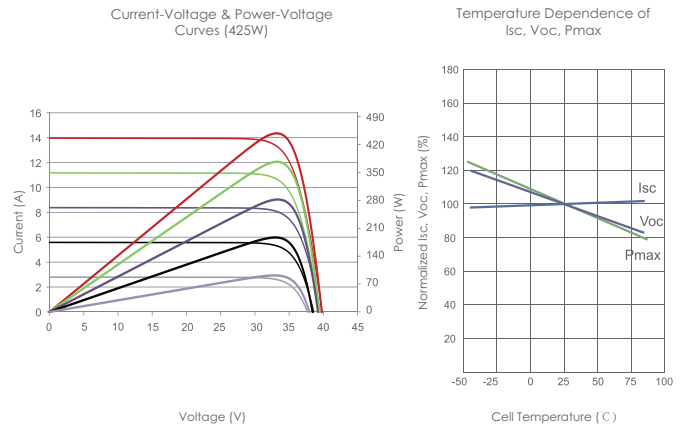

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	108 (2×54)
Dimensions	1762×1134×30mm (69.36×44.65×1.18 inch)
Weight	22 kg (48.50 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length
Connector Type	1000V:Staubli MC4JK03M/1B, JK03M2/1B, Jinko PV material 1500V:Staubli MC4-EVO2JK03M/2B, JK03M2/2B, Jinko PV material
Fire Class	Class C

SPECIFICATIONS

Module Type	JKM415N-54HL4R		JKM420N-54HL4R		JKM425N-54HL4R		JKM430N-54HL4R		JKM435N-54HL4R	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	415Wp	312Wp	420Wp	316Wp	425Wp	320Wp	430Wp	323Wp	435Wp	327Wp
Maximum Power Voltage (Vmp)	31.76V	29.55V	31.97V	29.78V	32.18V	29.99V	32.38V	30.10V	32.59V	30.33V
Maximum Power Current (Imp)	13.07A	10.56A	13.14A	10.61A	13.21A	10.67A	13.28A	10.73A	13.35A	10.78A
Open-circuit Voltage (Voc)	38.33V	36.41V	38.54V	36.61V	38.75V	36.81V	38.95V	37.00V	39.16V	37.20V
Short-circuit Current (Isc)	13.52A	10.92A	13.59A	10.97A	13.66A	11.03A	13.73A	11.09A	13.80A	11.14A
Module Efficiency STC (%)	20.77%		21.02%		21.27%		21.52%		21.77%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000/1500VDC (IEC)					with -V=1500V, without -V=1000V				
Maximum series fuse rating	25A									
Power measurement tolerance	±3%									
Temperature coefficients of Pmax	-0.30%/°C									
Temperature coefficients of Voc	-0.25%/°C									
Temperature coefficients of Isc	0.046%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

*STC: Irradiance 1000W/m² Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s